


lining. Combustible and heat sensitive wall linings or finishes must not protrude past the trim, to the glass viewing area. Some scenarios will require the use of 22mm DS Extended Trim Kit, or a custom solution, to provide further protection.

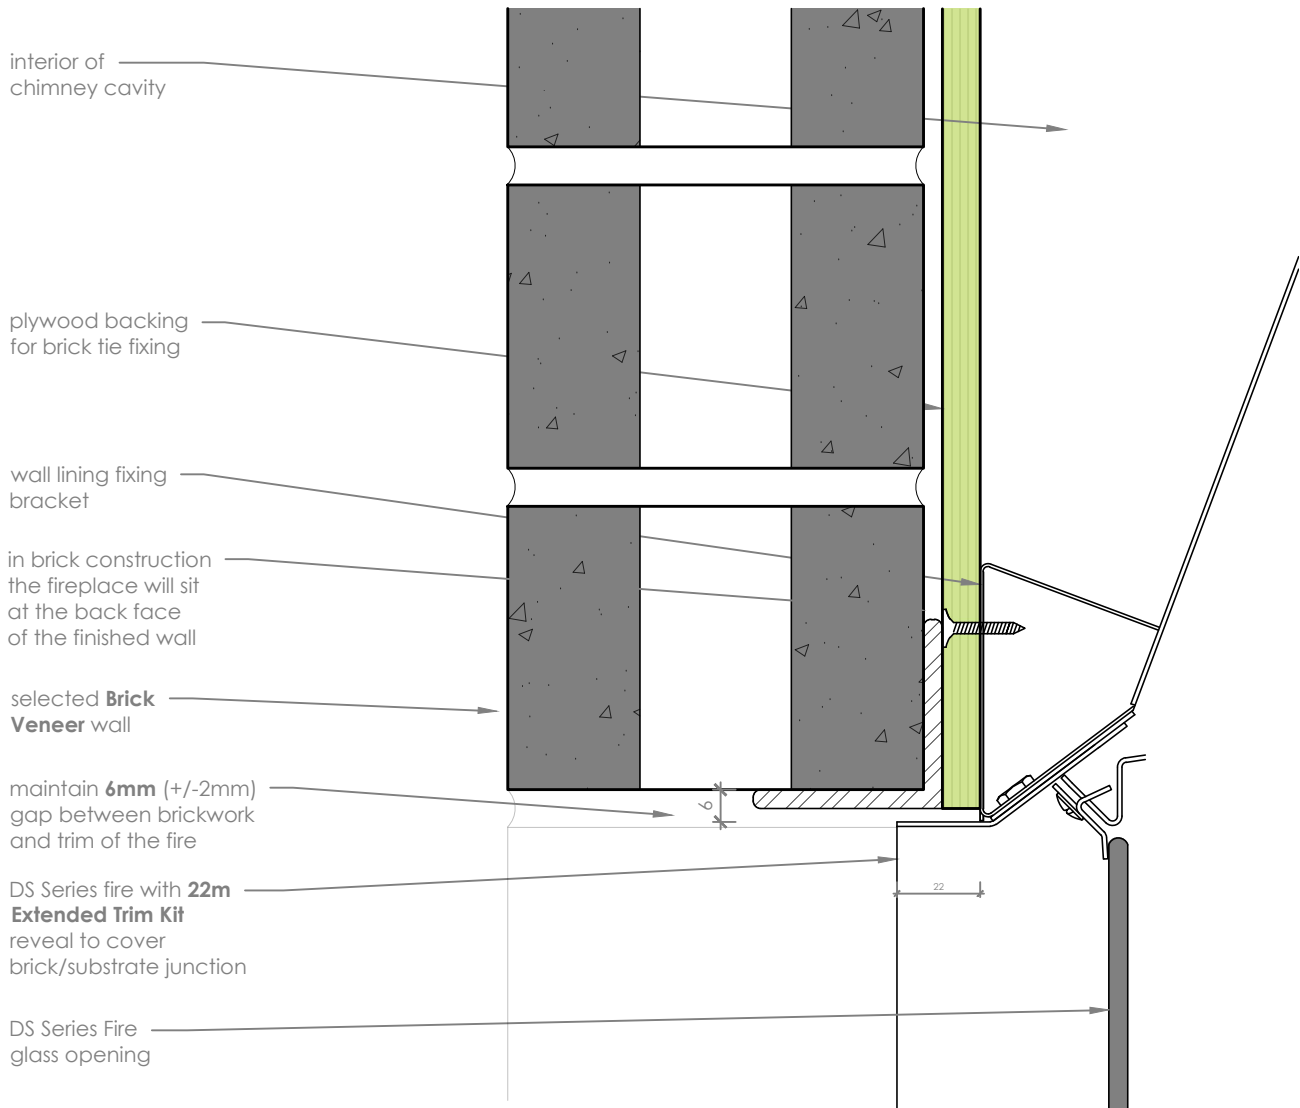

Brick Veneer Detail

scale 1:2

Notes:

- All dimensions are in mm. DO NOT SCALE OFF THESE DRAWINGS
- This detail is to assist in the installation of a **frameless finish** to a DS1150, DS1400, DS1650 or DS1900 Gas Fireplace.
- This detail is suitable for all for sides of the fireplace glass viewing area.
- Escea recommends when using these finishing methods that a **10-12mm substrate** is used.
- Use care when brick laying to avoid damaging powdercoated black fireplace reveals.
- Black fireplace reveals must be able to be removed - ensure any adhesive or mortar is kept clear.
- Allow for construction tolerance when setting out the opening within the Brick wall.
- First course above fire must have a good bond to the substrate.
- This technical sheet must be read in conjunction with the Escea DS Series Installation Manual, the latest version can be found on our website at www.escea.com.

GENERAL CONSTRUCTION AND FINISHES SHOWN INDICATIVE ONLY

Contact the ESCEA Architectural Advisory Team for assistance with the specification of this fire - aa@escea.com